



ULMATEC
PYRO

PYRO FUEL FIRED HEATER

E1118 - E1129

Ready for interface with our
Waste Energy Recovery System.



FEATURES


- Control system with a 7" touch screen
- Modbus TCP Communication, Interface to IAS
- Electrical heating elements for back up
- Heating of sanitary water

BENEFITS

- Long-life equipment
- Low life cycle cost
- Simplification of systems
- Easy installation
- Compact and space efficient
- Redundant heating sources



**ULMATEC
PYRO**

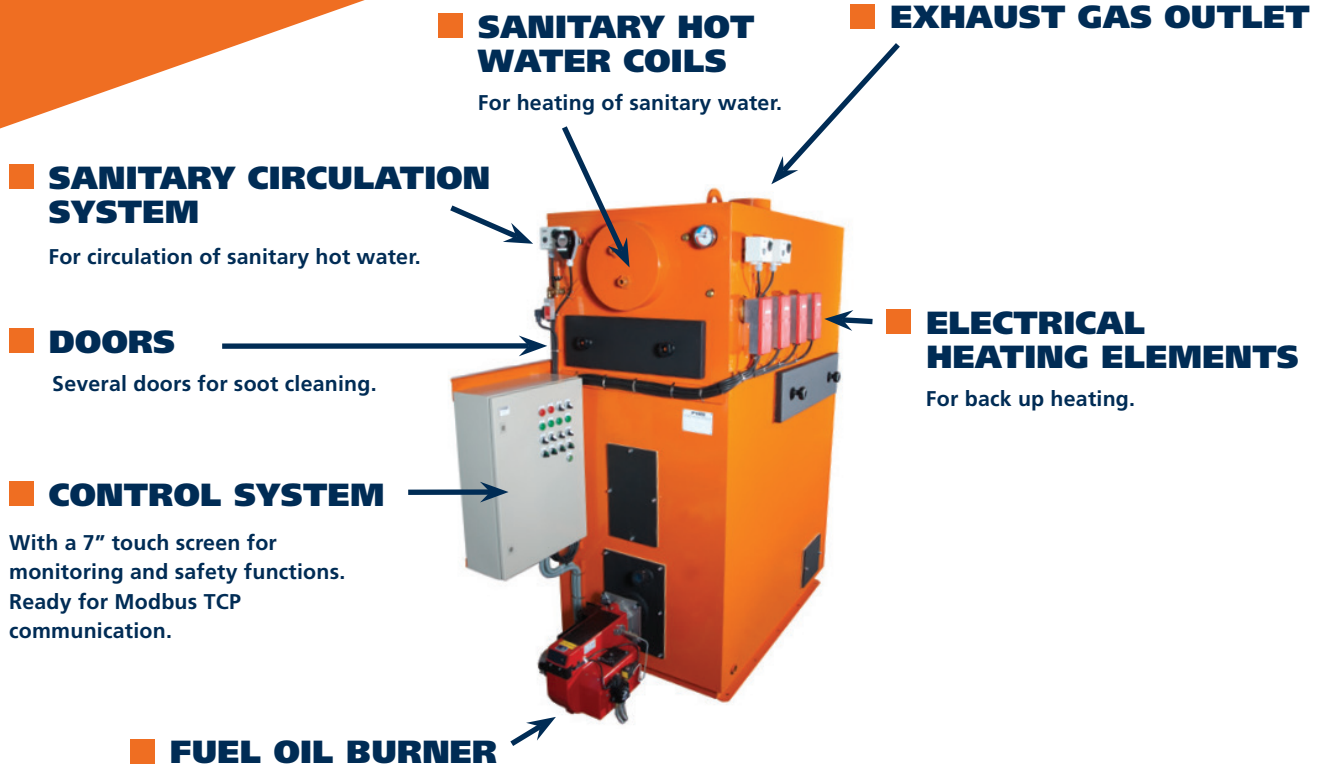

	E1118	E1122	E1127	E1129
Rated size [kW]	100	150	200	300
Design pressure [bar]	3	3	3	3
Working Temperature [°C]	95*	95*	95*	95*
<i>*Adjustable up to 95°C. Working temperature from 95-120°C upon request</i>				

ULMATEC PYRO AS

Hamnsundvegen 370
6280 SØVIK, NORWAY

Phone: +47 70 20 98 70

Fax: +47 70 20 98 90

Email: pyro@ulmatec.no

www.ulmatec.no